


Thank you for your purchase of the Mockingbird from Stami's Customs!

Here are some basic operating instructions and hook up guide.

More info available @ www.stamiscustoms.com

The Mockingbird Stereo is a very simple circuit consisting of a stereo 100w (RMS) 200w (peak) rated L-Pad, and two 500V SoZo coupling capacitors to pass high frequencies around the L-Pad when attenuating. As we know, tube amplifier ratings can vary based on actual output tubes used, transformer ratings, and even wall voltage. That being said, I have conservatively rated these @ 65 Watts 8 Ohms. This allows for a +40% buffer for headroom and proper cooling. The Mockingbird will get fairly warm especially after hours of playing.

Proper hook up: The top row of jacks, (RED), always goes to the amplifier while the bottom row of jacks, (BLACK), connect directly to the speaker input. Always use Speaker cable of 16GA or larger for the amp/speaker connections.

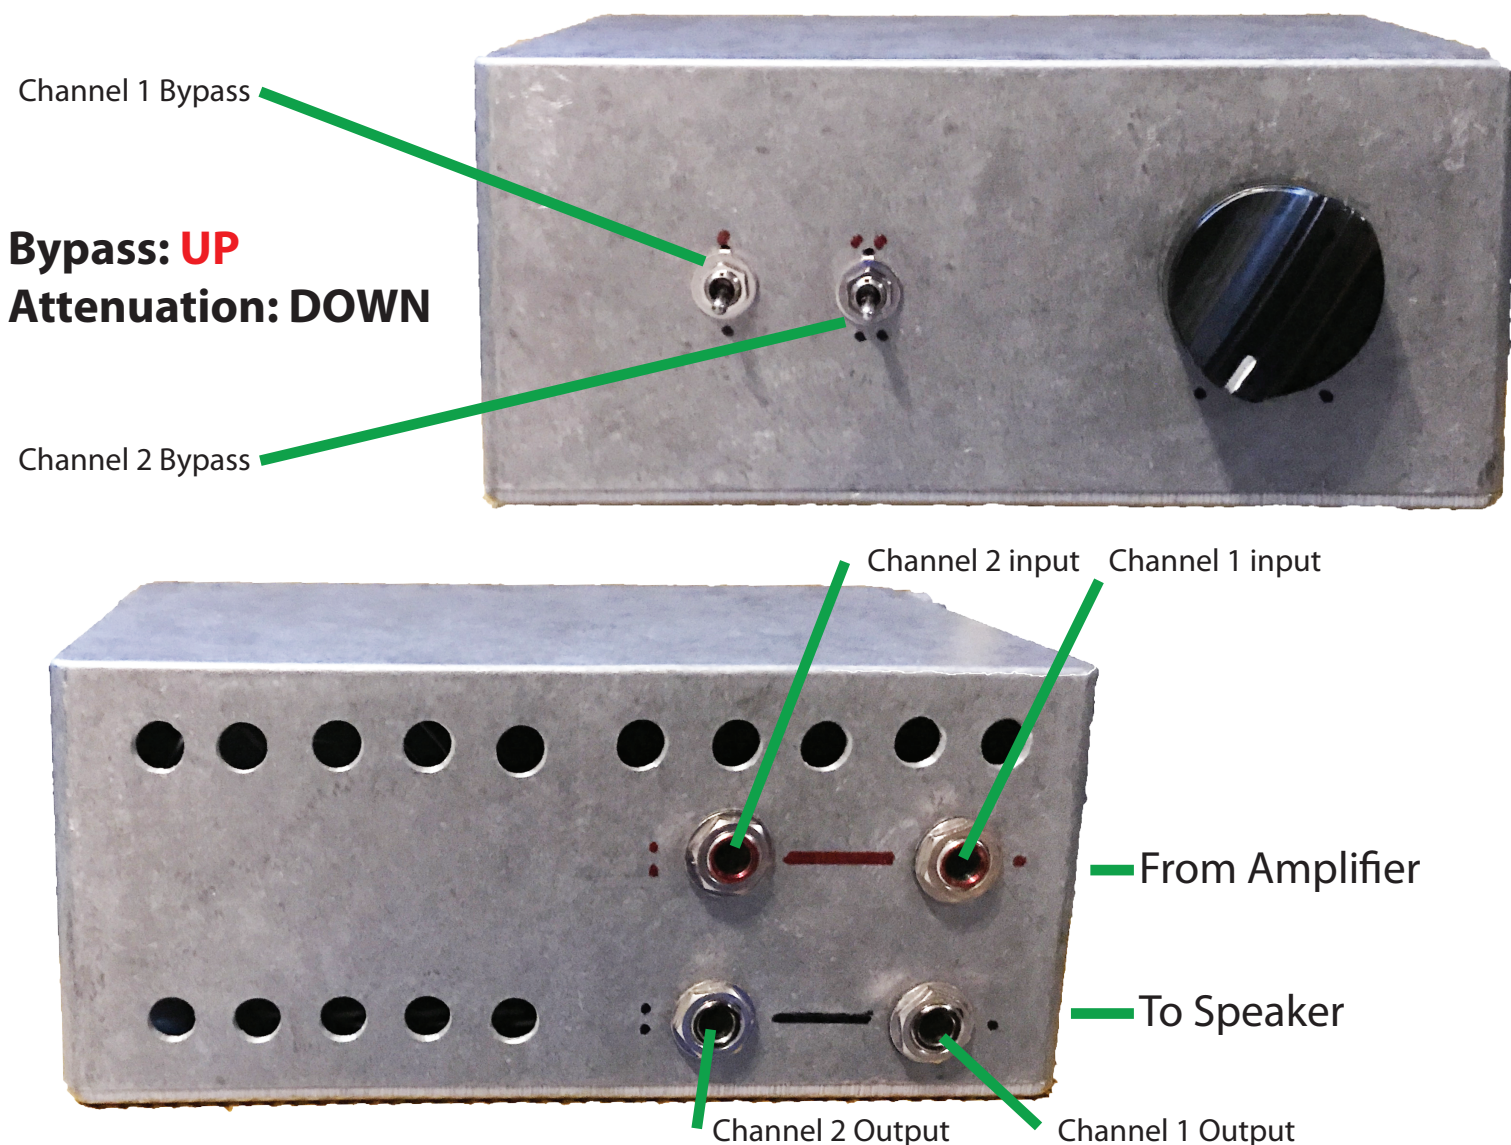

IMPORTANT! - Make sure your amplifier output is rated for the Impedance of the attenuator. If it is not, do not use. As this could cause damage to your amplifiers output transformer. You have been warned! I will not accept responsibly for improper use or hook up. Use with amplifiers rated over the wattage of the select attenuator is at your own risk!